

NIKLAN-F-**xxx**M2I-00 -BK — 2/4/6/8/12/16/24/32/36/48


NIKLAN / 50/125 / OM2,
()-LSLTx,

NIKLAN-F-**xxx**M2I-00C-BK

ISO/IEC 11801 OM2



()-LSLTx

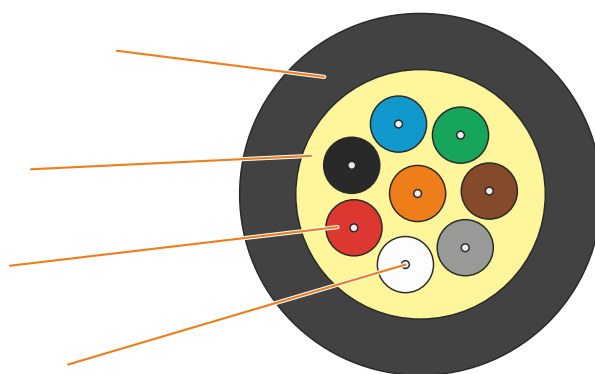

MM 50/125

NIKLAN-F-008M2I-00C-BK

8

50/125,

OM2,

()-LSLTx,

NIKOMAX NETWORK SOLUTIONS /// NIKLAN NKL-F-008M2I-00C-BK 8 x MULTI MODE 50/125 ISO/IEC 11801 OM2 -40C Hr(A)-LSLTx DGYM**xxxxM**

NKL-F-xxxM2I-OOC-BK										
	2	4	6	8	12	16	24	32	36	48
	50/125 (Multi Mode)									
	ISO/IEC 11801 OM2									
	900 ± 25									
	(A)-LSLTx									
	4,0 ± 0,2	4,9 ± 0,2	5,2 ± 0,2	5,5 ± 0,2	6,2 ± 0,2	7,3 ± 0,2	8,5 ± 0,2	9,5 ± 0,2	9,5 ± 0,2	10,5 ± 0,2
	15,0	18,0	23,0	27,0	36,0	55,0	65,0	70,0	74,0	110,0
	10 Ø									
	440					660				800
	100 /c									
	-40 +70 °C.					0 +70 °C.				
	-40 +70 °C.									
()	450x400	600x400			650x400	700x600		800x600		900x600
	- 5 . 25 - NIKOMAX									

	850	1300
	2,3	0,6

*

	15	15	37,5	37,5
	2	100	100	100
	850	1300	850	1300
	1,0	1,0	0,5	0,5

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48

				3	
NKL-F-002M2I-OOC-BK	2	MM 50/125	UV LSZH-	0,08	34
NKL-F-004M2I-OOC-BK	4	MM 50/125	UV LSZH-	0,14	46
NKL-F-006M2I-OOC-BK	6	MM 50/125	UV LSZH-	0,14	50
NKL-F-008M2I-OOC-BK	8	MM 50/125	UV LSZH-	0,14	56
NKL-F-012M2I-OOC-BK	12	MM 50/125	UV LSZH-	0,17	64
NKL-F-016M2I-OOC-BK	16	MM 50/125	UV LSZH-	0,34	125
NKL-F-024M2I-OOC-BK	24	MM 50/125	UV LSZH-	0,34	150
NKL-F-032M2I-OOC-BK	32	MM 50/125	UV LSZH-	0,43	180
NKL-F-036M2I-OOC-BK	36	MM 50/125	UV LSZH-	0,43	190
NKL-F-048M2I-OOC-BK	48	MM 50/125	UV LSZH-	0,54	240